

COMPRESSION COUPLINGS

EURAC


6



Suitable for pneumatic conveying systems from full vacuum to 8 barg. fitted with block clamp.

L mm : 100/150/200/250/300


2 LP

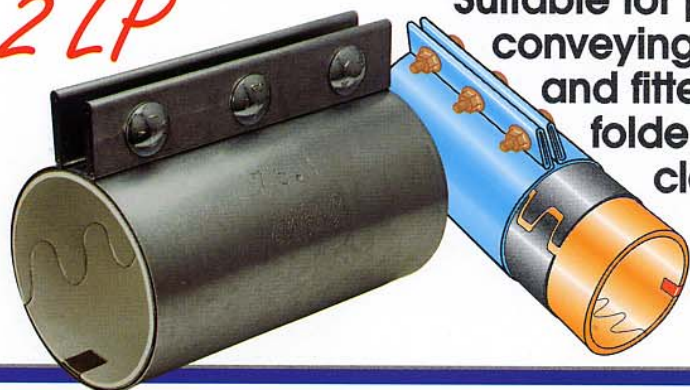

Suitable for pneumatic conveying systems and fitted with folded laminar clamp.

L mm : 100/150

Ex

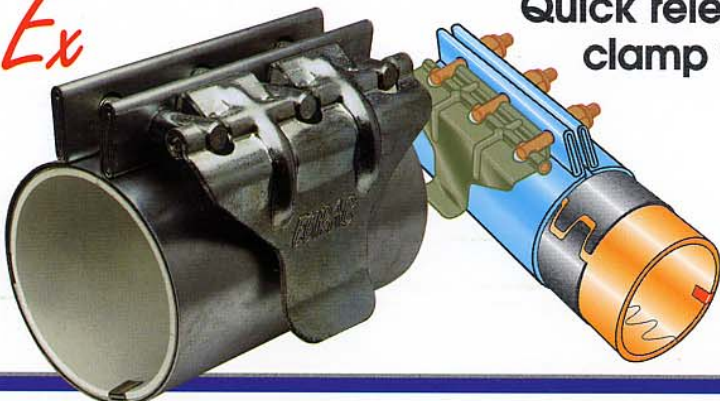

Quick release clamp version.

L mm : 150/300


AVAILABLE Ø mm

33,7	100,0
38,1	101,6
40,0	104,0
45,0	105,0
48,3	108,0
50,0	114,3
54,0	125,0
55,0	127,0
60,3	129,0
63,5	133,0
65,0	139,7
69,0	145,0
70,0	154,0
75,0	155,0
76,1	159,0
80,0	168,3
82,0	193,7
84,0	219,0
85,0	254,0
88,9	273,0
90,0	324,0
95,0	

N° BOLTS

L mm	N°
100	2
150	3
200	4
250	5
300	6

TIGHTENING TORQUES

TYPE	M 12	M 16
6	•<88,9	•≥88,9
6 LP	•<88,9	•≥88,9
Ex	33,7•114,3	
 mm	18	24
TORQUE N/m	60	120

- Simple and fast on-site assembly.
- No special tools required.
- Self alignment of pipes.
- Earth strip fitted as standard.

- White food quality nitrile gasket.
- Available in either galvanized or stainless steel.
- Specials available with high temperature gaskets, joining pipes with different diameters.

ROTAVAL

BUMPERS WAY, BUMPERS FARM INDUSTRIAL ESTATE
CHIPPENHAM, WILTS, ENGLAND SN14 6LH

TEL (01249) 651138 - FAX (01249) 462054

INTERNATIONAL : TEL +44 1249 651138 - FAX +44 1249 462054

E mail : sales@rotaval.co.uk - Web : www.rotaval.co.uk